

Fiber Optic Fault Locator


FIBERPOINT® 250G

Part Number: 1401000026



Ferrule 2.5 mm

- Applications:**
- The compact design of the visual fault locator is very suitable for **daily use** in all fiber optic applications e.g. **in the field, in industrial environment as well as in laboratories.**
 - Check **singlemode/multimode** optical fibers and other fiber optic components on faults.
 - **Patching** of fibers

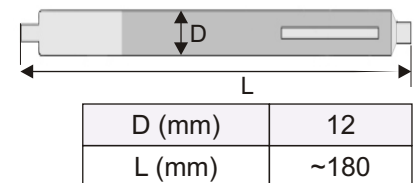

| Parameter | Min. | Typ. | Max. |
|-----------------------------|--------------------------------------|--------|--------|
| Wavelength | | 532 nm | |
| Operation temperature | 20 °C | | 30 °C |
| Storage temperature | - 40 °C | | 70 °C |
| Fiber coupled power | (Singlemode fiber 9/125 µm) | 500 µW | 700 µW |
| | (Multimode fiber 50/125 µm) | 500 µW | 800 µW |
| Optical output power | | | 1 mW |
| Operation current | | 300 mA | |
| Retention force for ferrule | | 1-2 N | |
| Weight incl. batteries | | 60 g | |
| Battery type | | AAA | |
| Operation mode | Pulsed mode: Frequency 2-3 Hz | | |
| Laser protection class | 2 | | |
| Suitable ferrule 2.5 mm | DIN, E2000, FC, SC, ST | | |

- Included in delivery:**
- Dust cap
 - One battery pack
 - Instruction manual
 - "Quadrosafe" economy plastic shipping box

- Accessories (not included):**
- Adapters please see page 7/8 this brochure

- Feature:**
- Private labelling is available
 - Minimum order quantity applies

Notes: Do not use rechargeable batteries.

Compliant with RoHS-requirements (2002/95/EG vom 27.01.2003)

The above product specifications are subject to change without notice.

¹⁾ Battery: VARTA Industrial Alkaline No. 4003; 1.5 V; AAA; LR03 Micro; AM4; MN2400